

Code: 4G341

II B.Tech. II Semester Supplementary Examinations Nov/Dec 2018

Random Variables and Random Processes

(Electronics & Communication Engineering)

Max. Marks: 70

Time: 3 Hours

Answer all five units by choosing one question from each unit (5 x 14 = 70 Marks)

UNIT-I

1. a) A ball is selected from an urn containing two black balls, numbered 1 and 2, and two white balls, numbered 3 and 4. Let the events A, B and C be defined as follows $A=\{\text{black ball}\}$, $B=\{\text{even numbered ball}\}$ and $C=\{\text{ball number}<2\}$. Test A and B, A and C are independent or not. 7M
- b) A random variable X has the density function $f_X(x) = \frac{1}{2}u(x) \exp\left(-\frac{x}{2}\right)$ Define events $A = \{1 < X \leq 3\}$, $B = \{X \leq 2.5\}$, and $C = A \cap B$. Find the probabilities of events i) A, ii) B, and iii) C. 7M

OR

2. a) An experiment consists of observing the sum of the numbers showing up when two dice are thrown. Develop a model for this experiment. Also find $P(A)$ and $P(A \cap B)$. 8M
- b) Define distribution function. List out various properties of CDF. 6M

UNIT-II

3. a) A random variable X is uniformly distributed on the interval (-5,15). Another random variable $Y = e^{-X/5}$ is formed. Find $E[Y]$. 7M
- b) State and Prove the Chebychev's Inequality. 7M

OR

4. a) Write about moments about the origin and about the central moments. 7M
- b) Show that the mean value $E(X)$ and variance σ_X^2 of the Rayleigh random variable are $E[X] = a + \sqrt{\pi b}/4$ and $\sigma_X^2 = b(4 - \pi)/4$. 7M

UNIT-III

5. a) Define Joint density function. List out its various properties. 7M
- b) The joint density function of two random variables X and Y is $f_{X,Y}(x,y) = \frac{1}{12}u(x)u(y)e^{-\left(\frac{x}{4}\right)-\left(\frac{y}{3}\right)}$. Test X and Y are statistically independent or not. 7M

OR

6. a) Obtain the expressions for conditional distribution and density i) Point conditioning ii) Interval conditioning 6M
- b) Consider two independent uniform distributed random variables X_1 and X_2 having the same density $f_X(x) = \frac{1}{a}[u(x) - u(x - a)]$. Find the density function of $W = X_1 + X_2$ using Central Limit Theorem. 8M

UNIT-IV

7. a) Discuss the random process concept in detail. 7M
- b) Assume that an ergodic random process $X(t)$ has an autocorrelation function $R_{XX}(\tau) = 18 + \frac{2}{6+\tau^2} [1 + 4\cos(12\tau)]$ i) Find $|\bar{X}|$ ii) What is the average power in (t) . 7M

OR

8. a) Define Autocorrelation function and write its properties. 6M
- b) Given the random process $X(t) = A\cos(\omega_0 t) + B\sin(\omega_0 t)$ where ω_0 is a constant, and A and B are uncorrelated zero-mean random variables having different density functions but the same variance σ^2 , show that $X(t)$ is a wide-sense stationary but not strictly stationary. 8M

UNIT-V

9. a) Show that the power density spectrum for the random process is $S_{XX}(\omega) = \lim_{T \rightarrow \infty} \frac{E[|X_T(\omega)|^2]}{2T}$. 8M
- b) Find cross-correlation function for the given cross power density spectrum $S_{XY}(\omega) = \frac{8}{(\alpha + j\omega)^3}$ where $\alpha > 0$ is a constant. 6M

OR

10. a) Explain relationship between autocorrelation function and power spectrum. 8M
- b) Obtain autocorrelation function and power spectrum for white noise. 6M

Hall Ticket Number :

--	--	--	--	--	--	--	--	--	--	--

R-14

Code: 4G344

II B.Tech. II Semester Supplementary Examinations Nov/Dec 2018

Field Theory and Transmission Lines

(Electronics and Communication Engineering)

Max. Marks: 70

Time: 3 Hours

Answer all five units by choosing one question from each unit (5 x 14 = 70 Marks)

UNIT-I

1. a) Define "Electric Field", " Electric Potential" and "Electric Flux Density" from charge and Explain. 6M
- b) A circular ring lying on x-y plane having 5 cm radius is charged uniformly with the total charge of Q Coulombs. Find Electric field intensity at a point 10cm along z- axis. 8M

OR

2. a) Using Gauss's law derive the expression for electric field intensity and electric field density due to an infinite sheet of conductor of charge density ρ_s C/m² 7M
- b) Given the flux density $D = (16/r) \cdot \cos(2\theta) \mathbf{a}_\theta$ C/m², Find the total charge within the region $1 < r < 2m$, $1 < \phi < 2$ rad. 7M

UNIT-II

3. a) Define the term polarization. With necessary explanations give the relation between the electric flux density and electric field intensity with respect to a dielectric medium. 6M
- b) The dielectric sphere ($\epsilon_r = 5.7$) of radius 10 cm has a point charge 2 pC placed at its centre.
 - i) Calculate the surface charge density of the polarization charge on the surface of the sphere.
 - ii) The force exerted by the charge on a -4pC point charge on the sphere. 8M

OR

4. a) What is continuity equation and state its importance. 7M
- b) Find the capacitance of a 50 cm long coaxial cable, having conductors of 4cm and 2cm diameters separated by a medium of relative permittivity 2.4. Also find the stored energy and field at a radius of 1.5 cm in the dielectric when 10V is applied 7M

UNIT-III

5. a) With necessary mathematical expressions derive the magnetic field intensity due to finite and infinite lines. 8M
- b) A toroidal ring has 200 turns. The outer diameter of the ring is 15 cm with the inner diameter of 12 cm. Find the flux density if the current is 8A 6M

OR

6. a) Define and derive the Maxwell's curl equation involving Faraday's Law. Explain the concept of displacement current. 7M
- b) State and prove boundary equation for magnetic field between a dielectric and a dielectric medium 7M

UNIT-IV

7. a) What is a Poynting Vector, Give the physical interpretation?
Does the pointing theorem apply to static field? Explain. 7M
- b) In a medium characterized by $\sigma=0$, $\mu=\mu_0$, ϵ_0 and $E=20 \sin(10^8t-\beta z) \mathbf{a}_y$ V/m.
Calculate β and H. 7M

OR

8. a) Derive the expressions for reflection and transmission coefficients, when an perpendicularly polarized electromagnetic wave incidents obliquely on surface of a perfect dielectric 8M
- b) An EM wave travels in Free space with the electric field component $E_s= 100 e^{j(0.866y+0.5z)} \mathbf{a}_x$ V/m. Determine the
- Ω and λ
 - The magnetic field component 6M

UNIT-V

9. a) Derive the input impedance of the lossless transmission line. Evaluate Z_{sc} and Z_{oc} . 8M
- b) Discuss impedance matching and discuss about the various matching technique. 6M

OR

10. a) What is Smith Chart? Explain its important features. 6M
- b) An unknown load is connected to a 75Ω transmission line (lossless). Find the load that is connected if the location of the 1st minima is at a distance of 0.25λ away from the load and SWR is found to be 4. Then what is load impedance & load reflection coefficient 8M

Code: 4GC41

II B.Tech. II Semester Supplementary Examinations Nov/Dec 2018

Mathematics-III

(Common to EEE and ECE)

Max. Marks: 70

Time: 3 Hours

Answer all five units by choosing one question from each unit (5 x 14 = 70 Marks)

UNIT-I

1. a) Evaluate $\int_0^1 x^5 \left(\log \frac{1}{x}\right)^3 dx$ 7M
b) Separate $\log \sin(x + iy)$ into real and imaginary parts. 7M

OR

2. a) Prove that $\beta\left(m, \frac{1}{2}\right) = 2^{2m-1} \beta(m, m)$ 7M
b) If $\cosh(u + iv) = x + iy$ prove that (i) $\frac{x^2}{\cosh^2 u} + \frac{y^2}{\sinh^2 v} = 1$ (ii) $\frac{x^2}{\cos^2 u} - \frac{y^2}{\sin^2 v} = 1$ 7M

UNIT-II

3. a) If $f(z)$ is a regular function of z , prove that $\left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2}\right) |f(z)|^2 = 4|f'(z)|^2$ 7M
b) Find the analytic function whose real part is $e^x \{(x^2 - y^2) \cos y - 2xy \sin y\}$ 7M

OR

4. Find the analytic function $f(z) = u + iv$, if $u + v = \frac{2 \sin 2x}{e^{2y} - e^{-2y} - 2 \cos 2x}$ 14M

UNIT-III

5. a) Evaluate, using Cauchy's integral formula $\oint_C \frac{\sin^2 z}{\left(z - \frac{\pi}{6}\right)^3} dz$, where C is the circle $|z| = 1$ 7M
b) Find the Taylor's expansion of $f(z) = \frac{1}{(z-1)(z+1)}$ about the point $z = 1$ 7M

OR

6. a) Evaluate $\int_{1-i}^{2+3i} (z^2 + z) dz$, along the line joining the points $(1, -1)$ and $(2, 3)$ 7M
b) Find the Laurents series expansion of $f(z) = \frac{1}{(z-1)(z-2)}$ in the region $1 < |z| < 2$ 7M

UNIT-IV

7. a) Evaluate $\oint_C \frac{\sin \pi z^2 + \cos \pi z^2}{(z-1)^2(z-2)} dz$, where C is the circle $|z| = 3$ 7M
b) Evaluate $\int_{-\infty}^{\infty} \frac{x^2}{(x^2+1)(x^2+4)} dx$ 7M

OR

8. a) Find the sum of the residues of $f(z) = \frac{\sin z}{z \cos z}$ at its poles inside the circle $|z| = 2$ 7M
b) Use Rouché's theorem to show that the equation $z^5 + 15z + 1 = 0$ has one root in the disc $|z| < \frac{3}{2}$ and four roots in the annulus $\frac{3}{2} < |z| < 2$ 7M

UNIT-V

9. a) Find the bilinear transformation which maps the points $z = 1, i, -1$ onto $w = 2, i, -2$ 7M
b) Prove that the transformation $w = e^z$ 7M

OR

10. a) Prove that the transformation $w = \sin z$ 7M
b) Find the bilinear transformation which maps the points $z = i, 1 - i$ onto $w = 1, 0, \infty$ 7M

Hall Ticket Number :

R-14

Code: 4G346

II B.Tech. II Semester Supplementary Examinations Nov/Dec 2018

Pulse and Digital Circuits

(Electronics & Communication Engineering)

Max. Marks: 70

Time: 3 Hours

Answer all five units by choosing one question from each unit (5 x 14 = 70 Marks)

UNIT-I


1. a) Derive the expression for the output of a high-pass circuit excited by exponential input and ramp for different time constants. 8M
- b) A 20 Hz symmetrical square wave whose peak to peak amplitude is 1V is impressed upon a high –pass RC circuit whose lower 3-dB frequency is 10Hz. Calculate and sketch the output waveform for the first two cycles. What is the peak-to-peak output amplitude under steady-state conditions? 6M

OR

2. a) Define following 6M
- i. Transmission Error
 - ii. Percentage tilt
 - iii. Attenuator.
 - iv. Over compensation
 - v. Linear wave shaping
 - vi. integrator
- b) A square wave whose peak-to-peak value is 1V extends $\pm 0.5V$ with respect to ground. The duration of the positive section is 0.1 sec and of the negative section is 0.2 sec. if this wave form impressed upon an RC differentiating circuit whose time constant is 0.2s, what are the steady-state maximum and minimum values of the output waveform? Prove that the area under the positive section equals that under negative section of the output waveform. What is the physical significance of the result? 8M

UNIT-II

3. a) Give the circuits of different types of shunt clippers and explain their operation with the help of their transfer characteristics. 6M
- b) State and prove clamping circuit theorem. Sketch the output waveform that you would expect from the circuit shown in figure. 8M

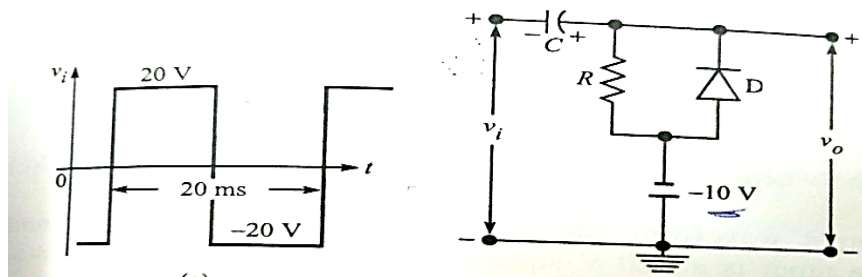


OR

4. a) Explain transfer characteristics of emitter coupled clipper and derive necessary equations.

6M

- b) Draw the transfer characteristics for the clipper circuit shown. Assume ideal Diodes.

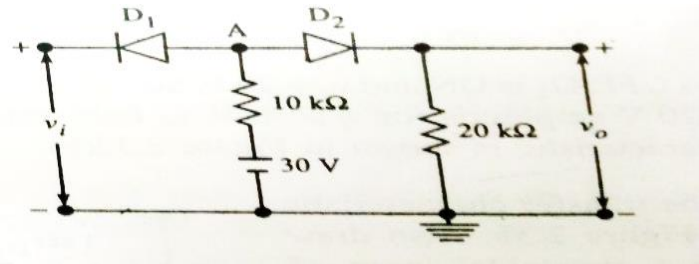

8M

UNIT-III

5. a) Explain and Derive the expression for frequency of oscillation of an Astable multi vibrator.

8M

- b) Design a collector coupled Astable multivibrator using NPN silicon transistors with $h_{fe}=40$, $r_{bb}=200$ supplied with $V_{cc}=10V$ and circuit component values are $R_c=1.2K$ and $C=270$ pF.

6M

OR

6. a) Explain the operation of a Monostable multivibrator and derive for the pulse width with necessary waveforms & circuits.

6M

- b) Design a symmetric collector-coupled astable multivibrator to generate a square wave of 10 kHz having peak-to-peak amplitude of 10 V where, $h_{FE \min} = 30$, $V_{CE(sat)} = 0.2$ V, $I_C(sat) = 2$ mA

8M

UNIT-IV

7. a) Define and derive the terms slope error, displacement error and transmission error.

8M

- b) In the transistor bootstrap circuit, $V_{CC}=25V$, $V_{BE}=-15V$, $R = 10k\Omega$, $R_E = 15K\Omega$, $R_B = 150K\Omega$, $C = 0.05 \mu F$, and $C_1 = 100 \mu F$. the gating waveform has a duration $T_g = 300\mu S$. The transistor parameters are $h_{fe} = 1.1$ K Ω , $h_{re} = 2.5 \times 10^{-4}$ K Ω , $h_{fe} = 50$, $h_{oe} = 1/40$ K Ω

a) Draw the waveforms of I_{C1} and V_O

b) What is the slope error of the sweep

c) What is the retrace time for C discharge completely.

6M

OR

8. a) How is deviation of linearity expressed? What do you mean by sweep time and restoration time?

6M

- b) How a compensation circuit improves the linearity of a Bootstrap voltage time base generator? Discuss.

8M

UNIT-V

9. a) Realize a NAND gate using DTL and TTL logic.

8M

- b) How pedestal is reduced in a gate circuit? Explain.

6M

OR

10. a) What are the limitations of bidirectional sampling gates explain the operation of four diode sampling gate.

6M

- b) Explain about unidirectional diode sampling gate. Write its advantages and disadvantages.

8M
